




# HTC Droid Incredible 4G LTE Midframe Replacement

How to replace the a broken or cracked midframe.

Written By: Tevin

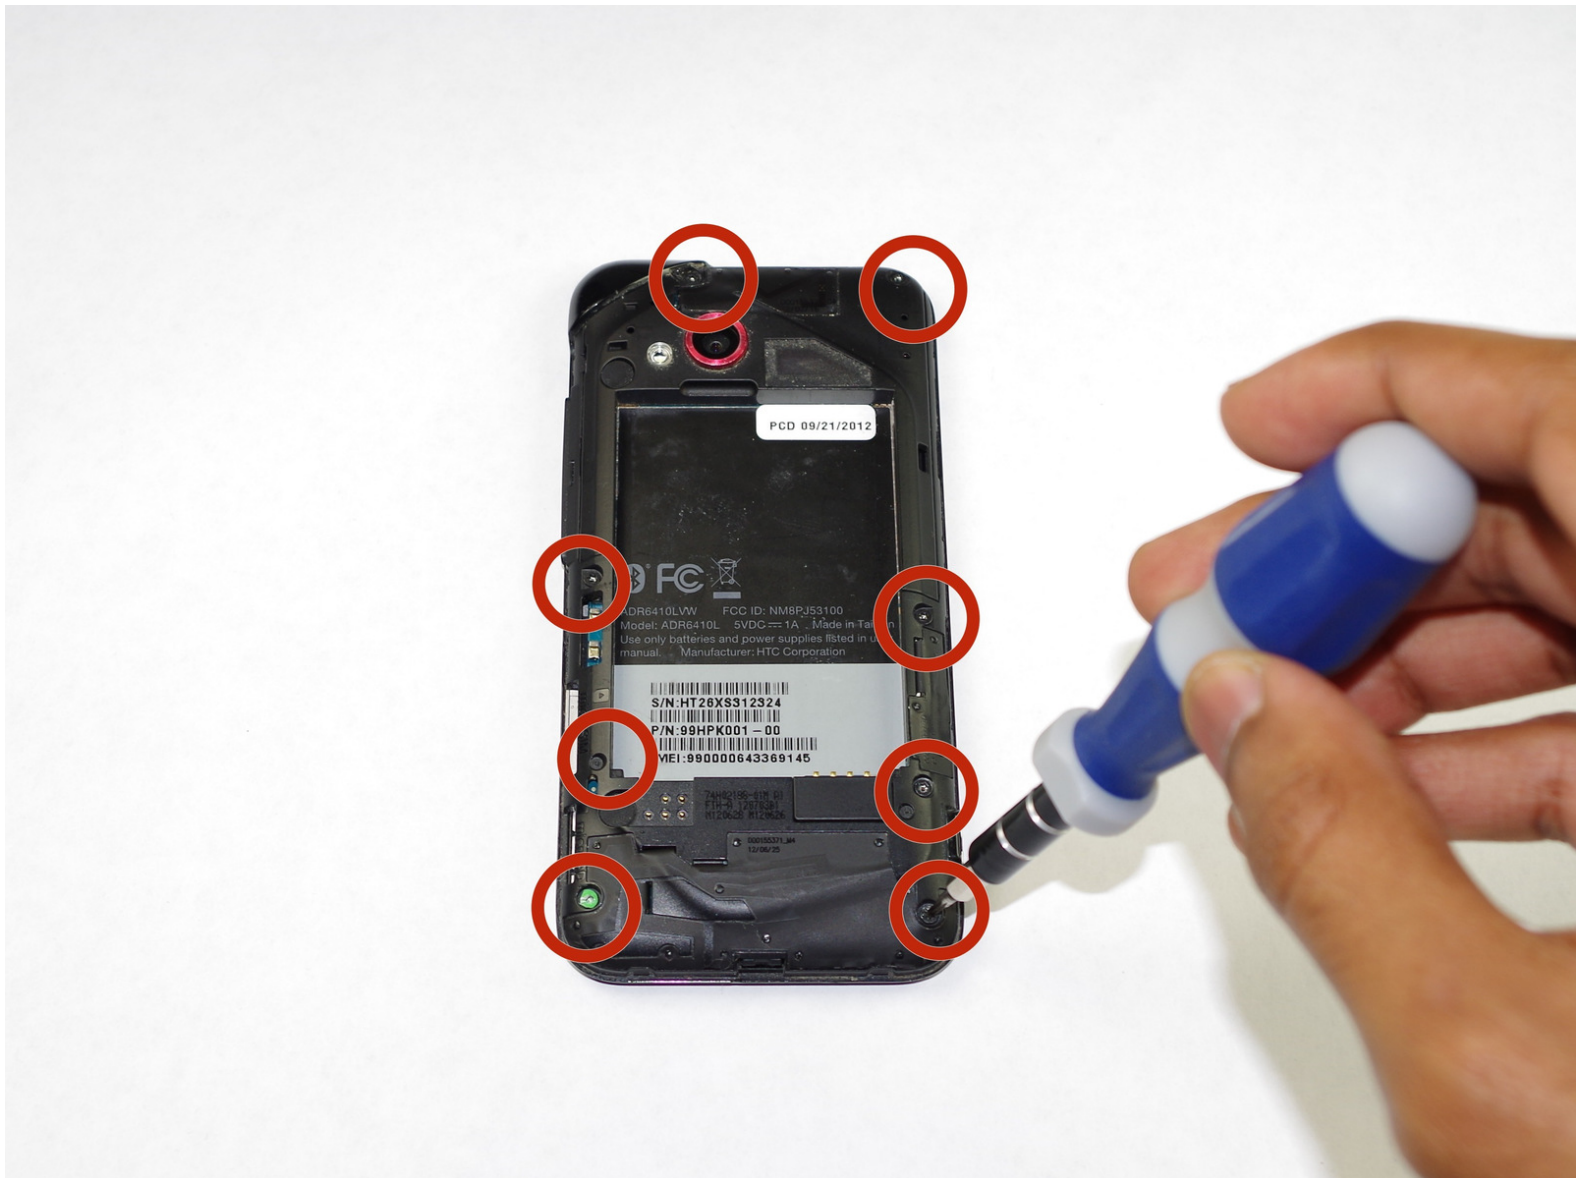

## INTRODUCTION

A broken midframe can result when the phone is dropped. Taking the midframe off as shown in the guide is necessary to minimize the risk of damaging other parts of the phone by simply prying the midframe off.



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [64 Bit Driver Kit](#) (1)
-

## Step 1 — Battery



- Use the plastic opening tool to pry off back cover by inserting opening tool in the space indicated and pushing down on the handle of the tool.

## Step 2



- Remove the battery after taking off the cover.

## Step 3 — Midframe



- Remove eight 4mm and one 5mm Torx screws.

## Step 4



- Use a prying tool to pry off the midframe.

To reassemble your device, follow these instructions in reverse order.

